

HNR-25DF/9




Main Feature

- Support 25-channel IP cameras input.
- Support H.264 / MJPEG decoding.
- Real-time Display & Playback.
- Support 5 Megapixel IP Camera for each channel.
- Support HDDs x9.
- Support e-SATA interface.
- Support HDMI Video interface.
- Support CMS (Central Management System) control.
- Audio Backup for all channels.
- Graphic User Interface (GUI).
- Support time-point backup function under Ethernet remote
- Up to four online clients for independent remote control; individual live-time, play-back & time-search function available.
- Support PPPoE/ Static/ DHCP IP & DDNS.
- Powerful mobile surveillance function, support i-Phone & Android.


Interface

Front Panel Layout

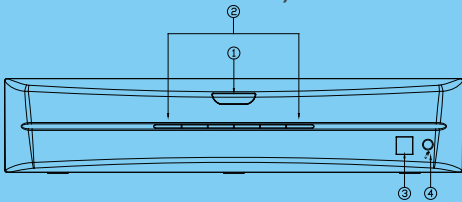

1. IR Sensor	3. USB Port
2. LEDs	4. Audio In

Back Panel Layout

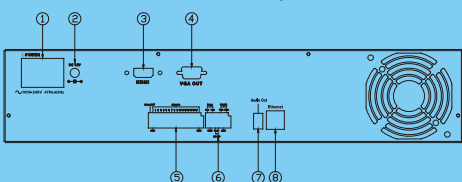

1. Power	5. Alarm In
2. Power	6. RS-485
3. HDMI	7. Audio Output
4. VGA Output	8. Ethernet



MODEL	25CH NVR	
System		
OS	Embedded Linux	
Connector	Ethernet	RJ-45X2, 10/100/1000 Mbps x1
	VGA output	D-SUB output
	HDMI output	HDMI output
	USB 2.0	Front : 2 ports
Power	100~240V, 50~60 Hz	
Video and Audio		
Video input	25 channels	
Audio input	25 channels	
NVR Functions		
Camera Name	Max. 20 characters	
Screen Split Control	1, 4, 9, 16, 25	
Image Control	Contrast / Brightness / Saturation / Hue	
Recording mode	Manual / Schedule / Alarm	
Pre Recording	1~5 sec	
Watermark	Support	
Searching and Playback		
Search Method	Date / Time / Event	
Date/ Time / Event/ Search	Selectable on the calendar	
Log Search	Through the log data to find the video event / time	
Backup Type	USB	
Remote Client Software		
Monitoring Environment	Hunt CMS, Iprosecu M.V2 for I phone / I pad, Iprosecu A.M.V2 for Android phone / Android pad, Web site	
IP cam Live View	25 Channels	
Remote Search	Web site remote time / event search	
System Monitoring and Recovery		
Monitoring	Watchdog	
Alarm		
Alarm Input	8 inputs	
Alarm output	1 outputs	
Peripheral Devices		
Audio in	3.5 Ø Earphone stereo jack	
Audio out	3.5 Ø Earphone stereo jack	
RS 485	2- pin terminal	
Storage & Backup Devices		
INTERNAL HDD SUPPORT	SATA HDD x 9	
EXTERNAL USB BACKUP DEVICE (PAN DRIVE,HDD, BURNER)	USB x2	
E-SATA	x1	
RAID	N/A	
Networking		
Type	Static/ DHCP/ PPPoE/DDNS	
Environment		
Operating Temp.	0 - 45 °C / 32~113 °F	
Humidity	0~80% RH (non-condensing)	
Language		
Type	English / Traditional Chinese / Simple Chinese / Russian / Italian / Japanese / Czech / France / Germany / Spanish / Portuguese	
Physical		
Color	Black	
Dimensions (W x H x D)	430 x 88 x 422 mm	
Weight	4 KG	