




IP CAMERA Series
NETWORK CCTV Surveillance



HP-9521 PEIR

2 Megapixel Network IR Water-proof Bullet Camera



1/2.9"
Sensor



Min.
Illumination



BLC



WDR



Motion
Detection



Day&Night



AWB



Sync



AGC



PoE




Water-proof



Feature

- 1080P full real time coding
- Max.re solution: 1920 x 1080
- 20-30m IR night view distance
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing more details to track events
- CVBS local video, one-way audio, PoE
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring
- NAT traversal

Dimension

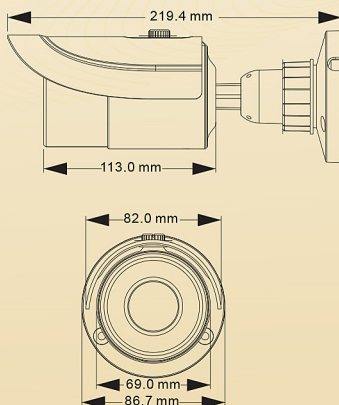

Specification

Model	HP-9521PEIR
Camera	
Image Sensor	1/2.9"CMOS
Image Size	1920 x 1080
Electronic Shutter	1/25s ~ 1/100000s
Min. Illumination	0LUX(IR LED ON)
Lens	6mm(4mm,8mm optional)
Lens Mount	M12
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Image	
Video Compression	H.264
Resolution	1080P(1920x1080), 720P(1280x720), VGA(640x480), QVGA(320x240)
Multi-stream	1920x1080(1~30fps) / 1280x720(1~ 30fps) 1280x720(1 ~10fps) / 640x480(1 ~ 30fps) /320x240(1 ~30fps)
Bit rate	64Kbps ~ 4Mbps
Encode Mode	VBR/CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	Saturation, Brightness, Contrast, etc. adjustable through client software or web browser
Audio Compression	G711A
Interfaces	
Network	RJ45
Video Output	BNC x 1
Audio	One-way audio(MIC IN x1)
Functions	
Remote Monitoring	IE browsing,CMS remote control
Online Connection	4 online user
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP
Connection Protocol	ONVIF, GB-T/28181-2011
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day&Night	ICR
PoE	Yes
Plug & Play	Yes
IR Distance	20-30m
Water-proof	IP66
Others	
Power Supply	DC12V/POE
Operating Environment	-40 °C~50 °C,10% ~90% humidity
Dimensions	Φ87mm x 219mm
Weight (net)	635g