

Hi-774


Feature

- 1/3" SONYExmor CMOS Sensor
- Resolution 850 TV Line
- Min. Illumination(F1.2) 0.05Lux(IR LED Off)
- IR LED Array 2pcs
- IR Distance 25 M
- Lens Fixed 3.6mm (6/8mm Optional)
- Functions AGC, BLC, ATW, Auto Iris
- IP Rank 68
- Power supply DC12V



Specification

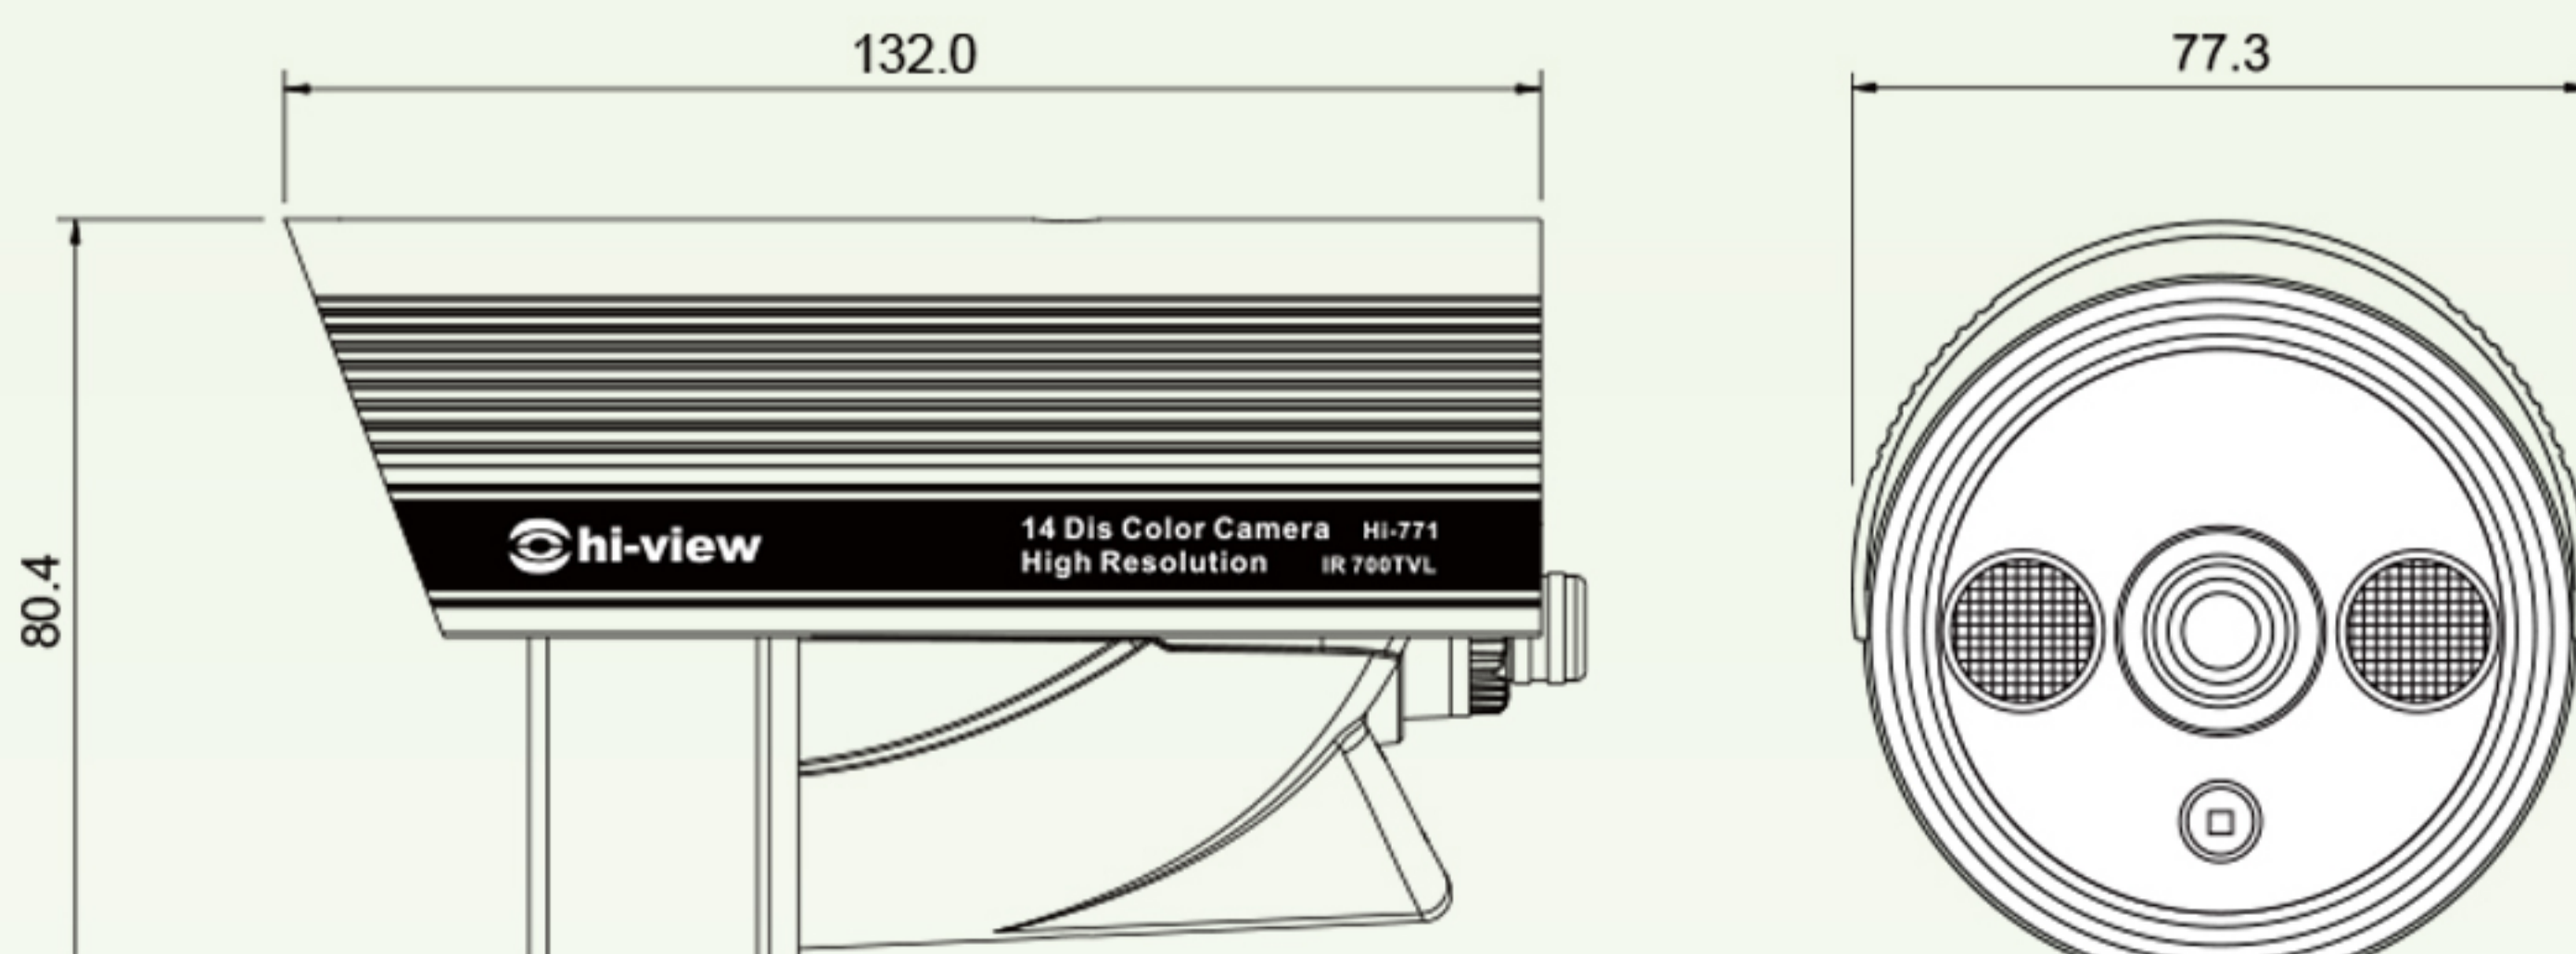

Model	Hi-774	IPRank	IP68
Resolution	850TVL	Lens Mount	M12
Image Sensor	1/3" SONYExmor CMOS Sensor	Les	3.6mm, 6.0mm, 8.0mm
Min. Illumination (F1.2)	0.05 Lux (IR LED off)	Operating Voltage	DC 12V ±10%
Scanning Frequency	PAL(15625Hz/50Hz) / NTSC(15734Hz/59.94Hz)	Power Waste	8.5W (DC12V)
Synchronization	INT	Operating T emperature / Humidity	-10°C ~ +50°C / 30% ~ 90%RH
Number of effective pixels	1280X1024/1310K	Storage T emperature / Humidity	-30°C ~ +80°C / 0% ~ 90%RH
S/N Ratio	> 52 dB (AGC Off)	Video Output Level	1.0 Vp-p 75 Ω
Gain Control	Built-in	Connector	BNC and DC
Backlight Compensation	Built-in	Dimension(mm)	132 x 77.3 x 80.4 (without Bracket)
Electronic Noise	2D-DNR	Weight(g)	360 g
White Balance	ATW	<h2 style="color: red;">Dimension</h2> 	
Shutter Speed	Auto: (1/50(1/60)~120,000Sec)		
Color to Black	Auto (IR Control)		
IR Resection	Built-in		
IRIS Control	Auto Electronic IRIS		
IR LED	850nm / 90 , 2ea(BMax-IR LED)		
IR Visible Distance	25M		