




3D Panormic camera
VR Camera

Specification

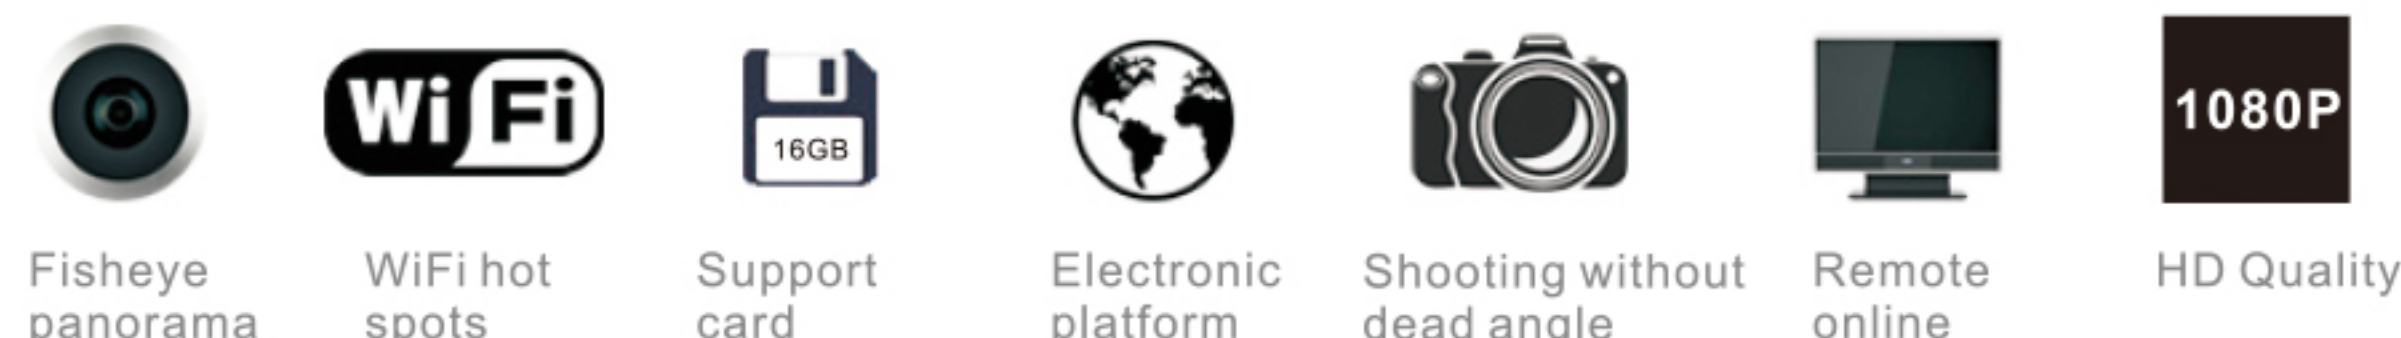

Feature

- 1/3" Smartsens SC3035 CMOS sensor
- 3MP (2048Hx1536V@60fps)
- Fish eye lens 1.9mm.
- IR LED 18 Pcs., IR Distance 10-20M.
- Support TF-card x1 (Max. 128GB.)
- Support Build-in Wi-Fi (With AP mode)
- Support Esee Cloud

Model

HP-55VR30

Image Sensor	1/3" Smartsens SC3035 CMOS sensor
Sensor Resolution	3MP (2048Hx1536V@60fps)
Day&Night	Support Day&Night IRCUT
Dual stream	Support main stream/ sub stream
Stream Resolution	Main stream 1536x1536@13fps Sub stream 320x320@25fps
Bitrate Control	VBR/CBR
Video Format	50Hz/60Hz
Image Adjustment	Support (contrast, brightness, saturation, hue, sharpen
ATW	Support
WDR	Support
3DNR	Support
Privacy Mask	Support Max. 4 area
Camera OSD	Support
Protocol	IPv4, UPNP, DNS, DDNS, PPPoE, NTP
Domain Server	Dyndns, NO-IP, 3322, CHANGEIP, POPDVR, SKYBEST, DVRTOP
Cloud	Support Esee Cloud
AP Mode	Support Direct link with App, no need internet
Wi-Fi	Support Build-in
Audio	Support Mic-Built-in
Monitoring	Support IE11
Application	Support android/iOS (IPPro, hiviewwifi)
User Management	Support

Interface

Lens	Fish eye lens 1.9mm.
Infrared	IR LED 18 Pcs., IR Distance 10-20M.
Audio	Mic build-in x1
Speaker	Speaker build-in x1
TF-card	Support TF-card x1 (Max. 128GB.)
Reset button	X1
Ethernet port (RJ45)	X1 Speed 100Mbps
Power input	X1 (DC jack 12Vdc)
Wi-Fi	Support Build-in Wi-Fi (With AP mode)
Material	Metal case
Power supply	DC12V/1A.
Power consumption	IR Off: 1.9W / IR ON: 5.5W