




## Feature

- Using CAT.5 network patch cords support power for the wireless AP and IP camera
- Networking standard: IEEE802.3af/t
- Long distance transmission and power supply, maximum transmission distance is 200m
- DIP can be switched (VLAN isolation / non-isolation) (port of 3, 4 10M/100M)
- Upload port automatic flip (Auto MDI / MDIX)
- Network performance: Store-and-forward
- Intelligent power distribution and secure power supply system
- Power circuit protection function can protect environment
- Zero configuration feature power supply is automatically supplied to the adaptive equipment;
- Professional thunder design, high reliability, high stability;
- Nature cooling, small, compact, mute, all the designs are convenient for you to put
- Support: port no-load saving power.

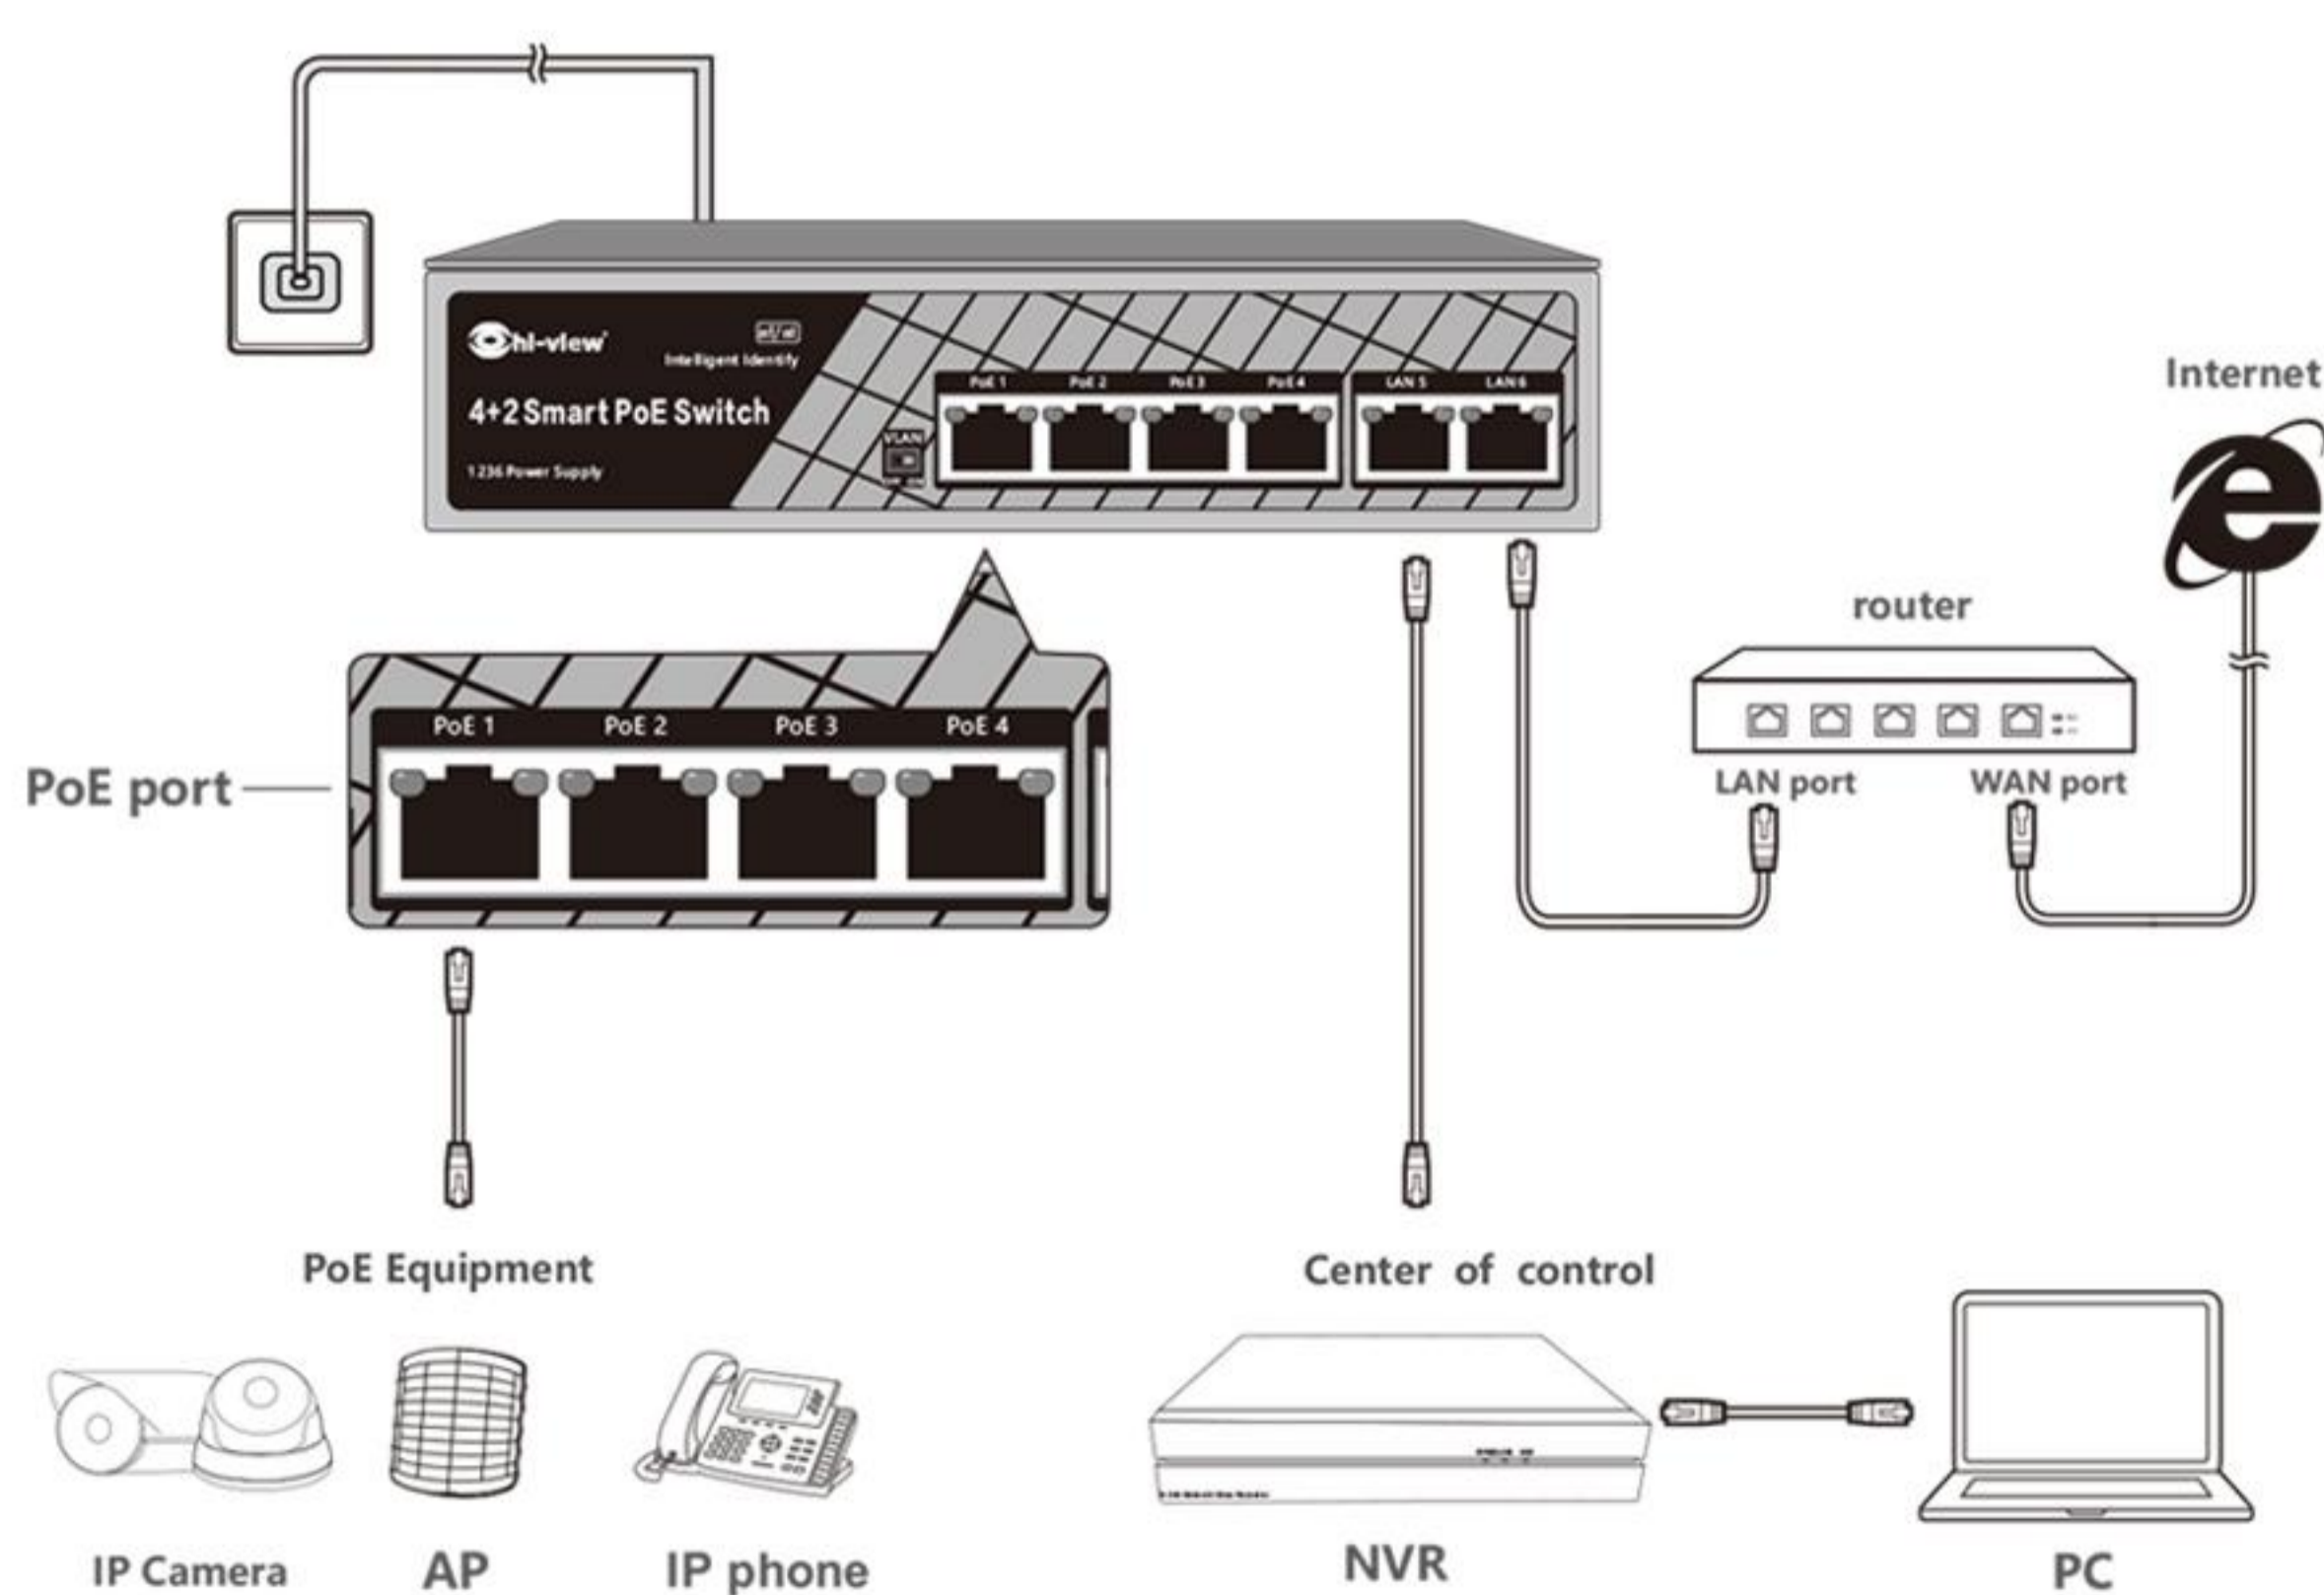

## Specification

Model	HG-P6 2P4
Network Interface	PoE (1~4) up-Link (5~6), Auto MDI / MDIX
SFP Port	-
Network Standard	IEEE802.3af/t
Long Distance Transmission	Max.200-250M
Network performance	Store-and-forward
Transmission Rate	100Mbps Full Duplex; 10 or 100Mbps Half Duplex 10BASE-T or 100BASE-TX RJ45 port of ethernet
Performance&Specification	Bandwidth : 1.2 Gbps (no barriers) Network Latency (10 to 100Mbps):20µs (use the 64 byte package size) MAC address table: 1K The Frame Filter & Transmission Rate 14800pps the most for 10M port 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.3af/at Power over Ethernet
PoE Core of Power Cable	Default: 1/2(+), 3/6(-) ; (Can Be Selected 4/5(+), 7/8(-))
LEDs Light	LAN5:Yellow on : 3-4 Ports transmission 200m(rate:10MB/S) LAN5:Yellow off : 1-4 Ports transmission 100m(rate:100MB/S)
Power Support	Power input: AC 110~220V/75W Power output: PoE1~4Port1/2(+52V),3/6(GND)
Size (LxWxH)	187mmx139mmx43mm
Operating Temperature	-10 °C~+40 °C ( -14 ~104 °F)
Storage Temperature	-40 °C~+70 °C ( -104 ~158 °F)
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing
Electromagnetic Compatibility	CE mark FCC Part 15, Class B VCCI Class B EN 55022 (CISPR 22) C-Tick
Lightning Protection	-
Port no-load Saving Power	Support
Package Content	AC Power Cable, Installation Manual Warrantly Card