




Feature

- Using CAT.5 network patch cords support power for the wireless AP and IP camera
- Networking standard: IEEE802.3af/t
- Long distance transmission and power supply, maximum transmission distance is 200m
- DIP can be switched (VLAN isolation / non-isolation) (port of 7, 8 10M/100M)
- Upload port automatic flip (Auto MDI / MDIX)
- Network performance: Store-and-forward
- Intelligent power distribution and secure power supply system
- Power circuit protection function can protect environment
- Zero configuration feature power supply is automatically supplied to the adaptive equipment;
- Professional thunder design, high reliability, high stability;
- Nature cooling, small, compact, mute, all the designs are convenient for you to put
- Support: port no-load saving power.

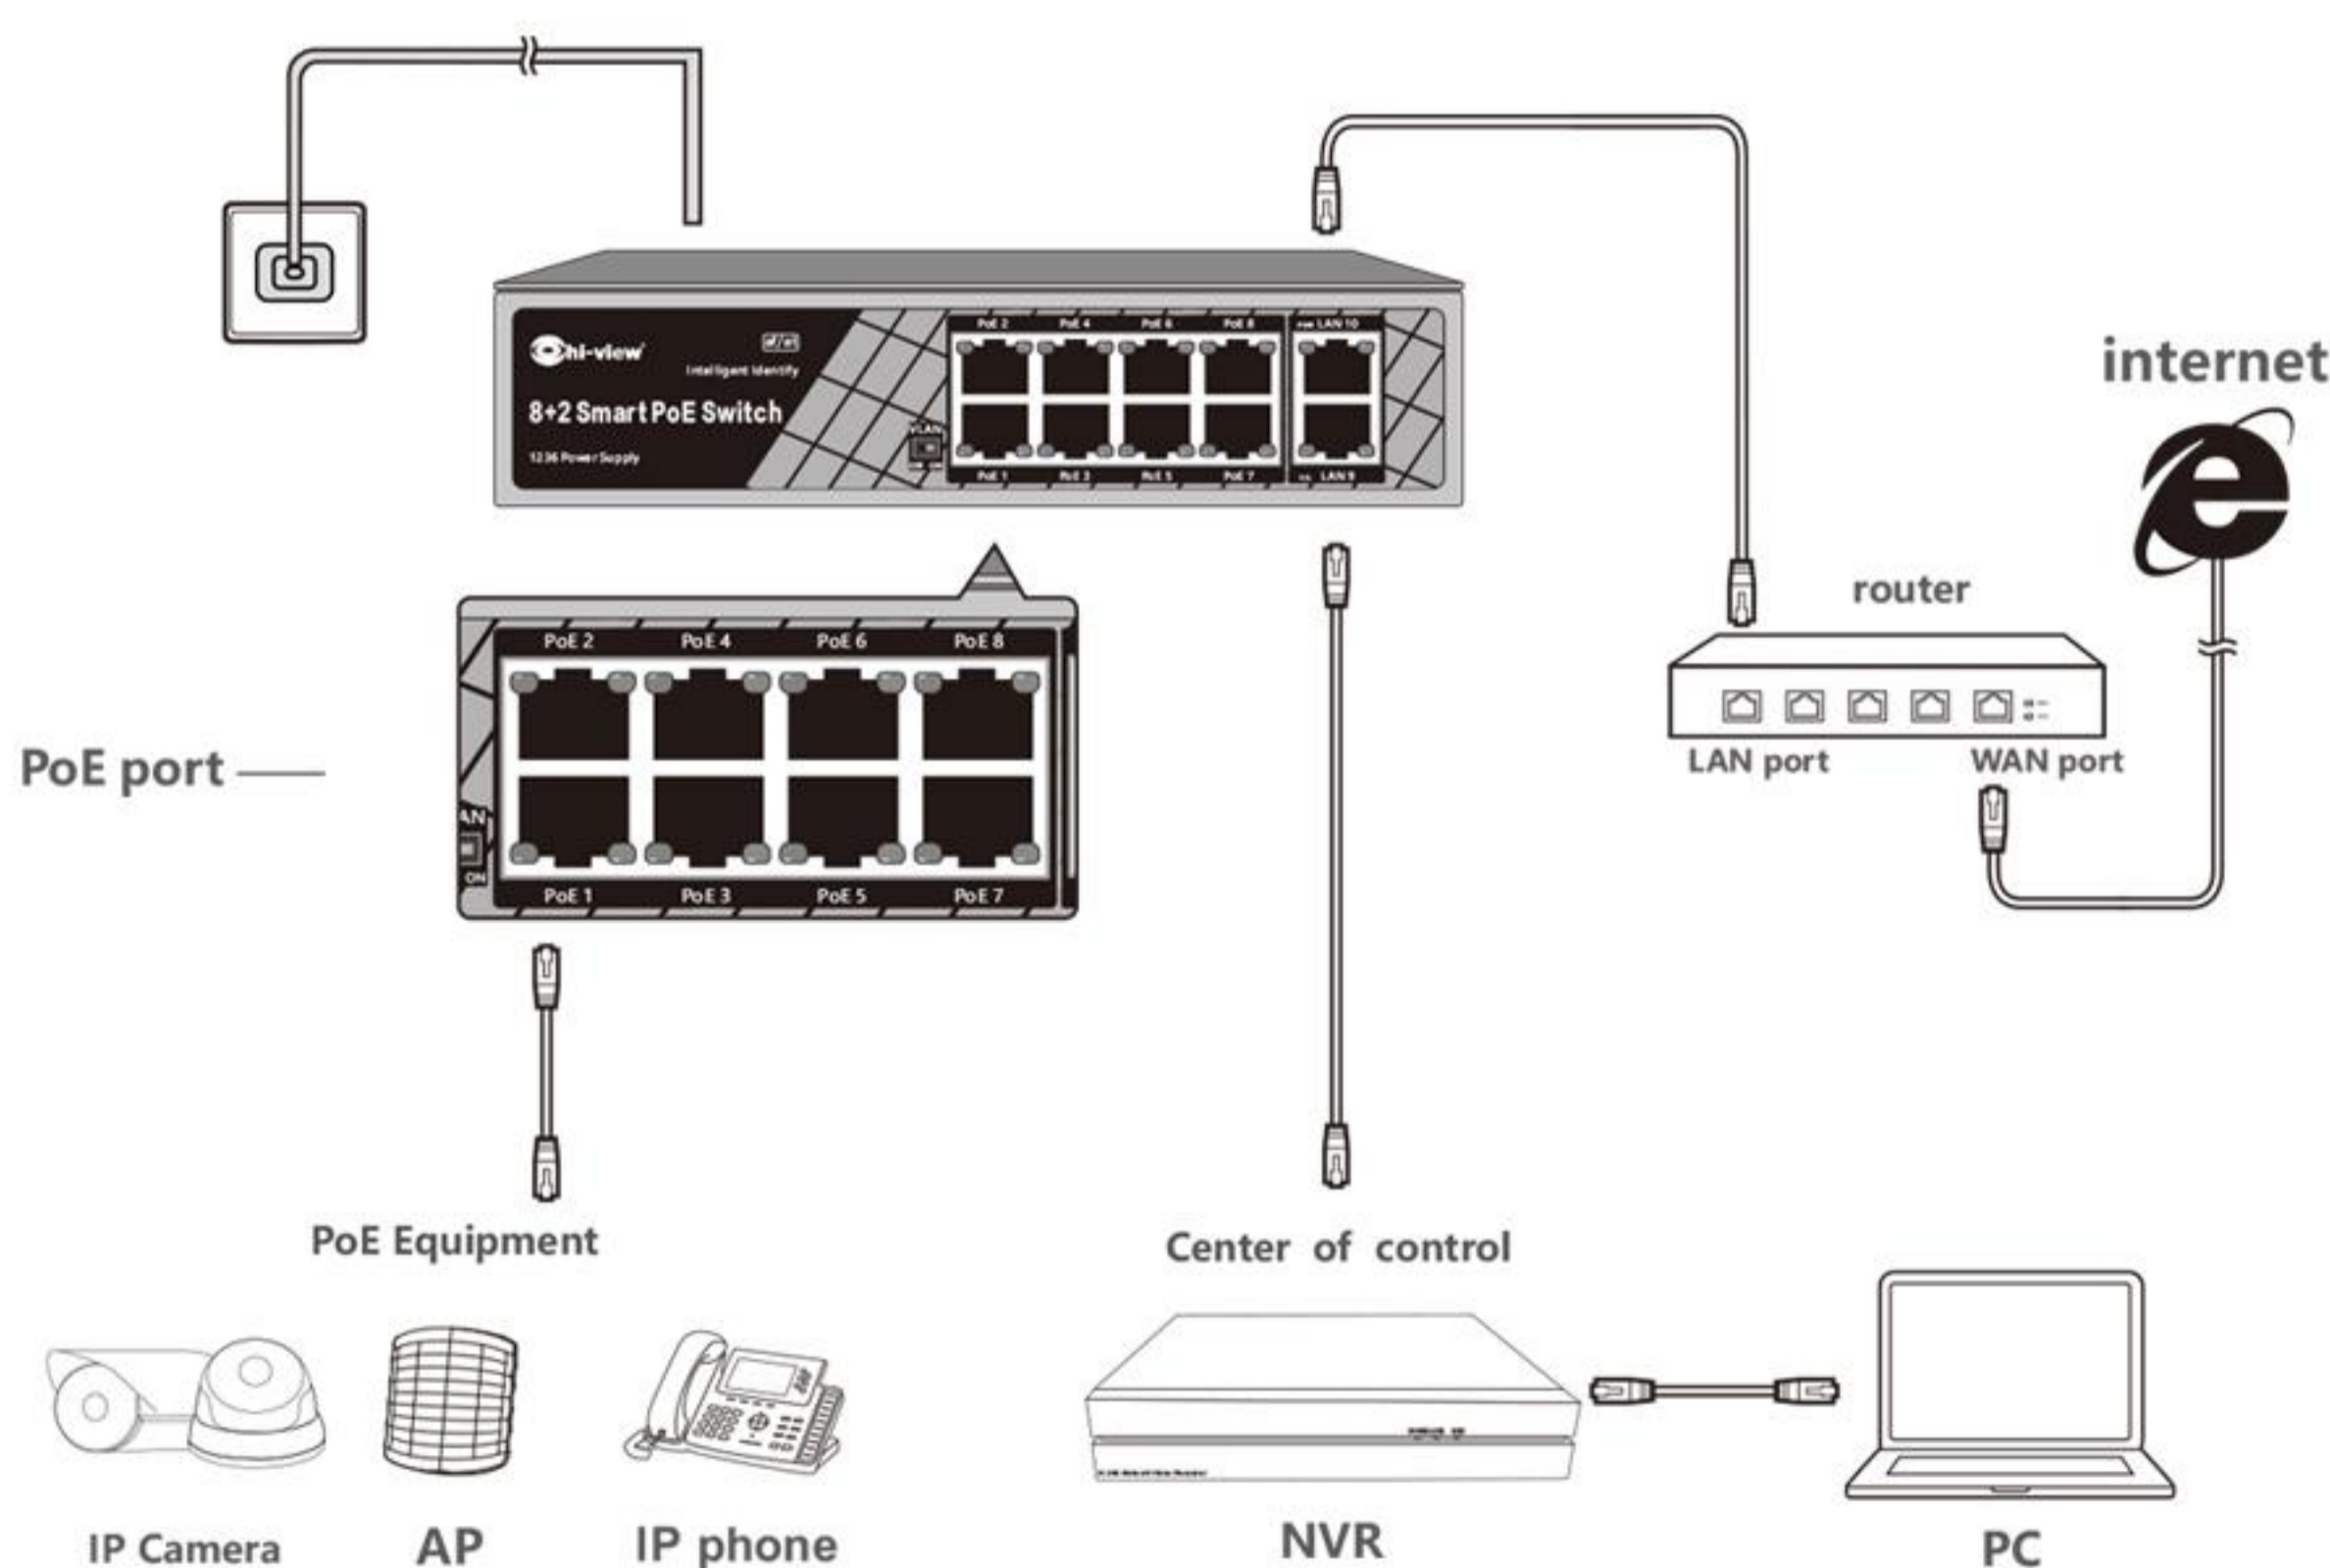

Specification

Model	HG-SW10 2P8
Network Interface	PoE(1~8) up-Link(9~10), Auto MDI / MDIX
SFP Port	-
Network Standard	IEEE802.3af/t
Long Distance Transmission	Max.200-250M
Network performance	Store-and-forward
Transmission Rate	100Mbps Full Duplex; 10 or 100Mbps Half Duplex 10BASE-T or 100BASE-TX RJ45 port of Ethernet
Performance&Specification	Bandwidth : 2.0 Gbps (no barriers) Network Latency(10 to 100Mbps): ≤20μs (use the 64 byte packge size) MAC address table: 1K The Frame Filter & Transmission Rate 14800pps the most for 10M port 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.3af/at Power over Ethernet
PoE Core of Power Cable	Default: 1/2(+), 3/6(-); (Can Be Selected 4/5(+), 7/8(-))
LEDs Light	LAN9:Yellow on :7-8 Ports transmission 200m(rate:10MB/S) LAN9:Yellow off : 1-8 Ports transmission 100m(rate:100MB/S)
Power Support	over input:AC 110~220V 150W Power output: PoE1~8Port1/2(+52V),3/6(GND)
Size (LxWxH)	187mmx139mmx43mm
Operating Temperature	-10 °C~+40 °C (-14 ~104 °F)
Storage Temperature	-40 °C~+70 °C (-104 ~158 °F)
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing
Electromagnetic Compatibility	CE mark FCC Part 15, Class B VCCI Class B EN 55022 (CISPR 22) C-Tick
Lightning Protection	-
Port no-load Saving Power	Support
Package Content	AC Power Cable, Installation Manual Warranthy Card