


## Specification



## Feature

- Using CAT.5 network patch cords support power for the wireless AP and IP camera
- Networking standard: IEEE802.3af/t
- Long distance transmission and power supply, maximum transmission distance is 200m
- DIP can be switched (VLAN isolation / non-isolation) (port of 1-6 10M/100M)
- Upload port automatic flip (Auto MDI / MDIX)
- Network performance: Store-and-forward
- Intelligent power distribution and secure power supply system
- Power circuit protection function can protect environment
- Zero configuration feature power supply is automatically supplied to the adaptive equipment;
- Professional thunder design, high reliability, high stability;
- Nature cooling, small, compact, mute, all the designs are convenient for you to put
- Support: port no-load saving power.

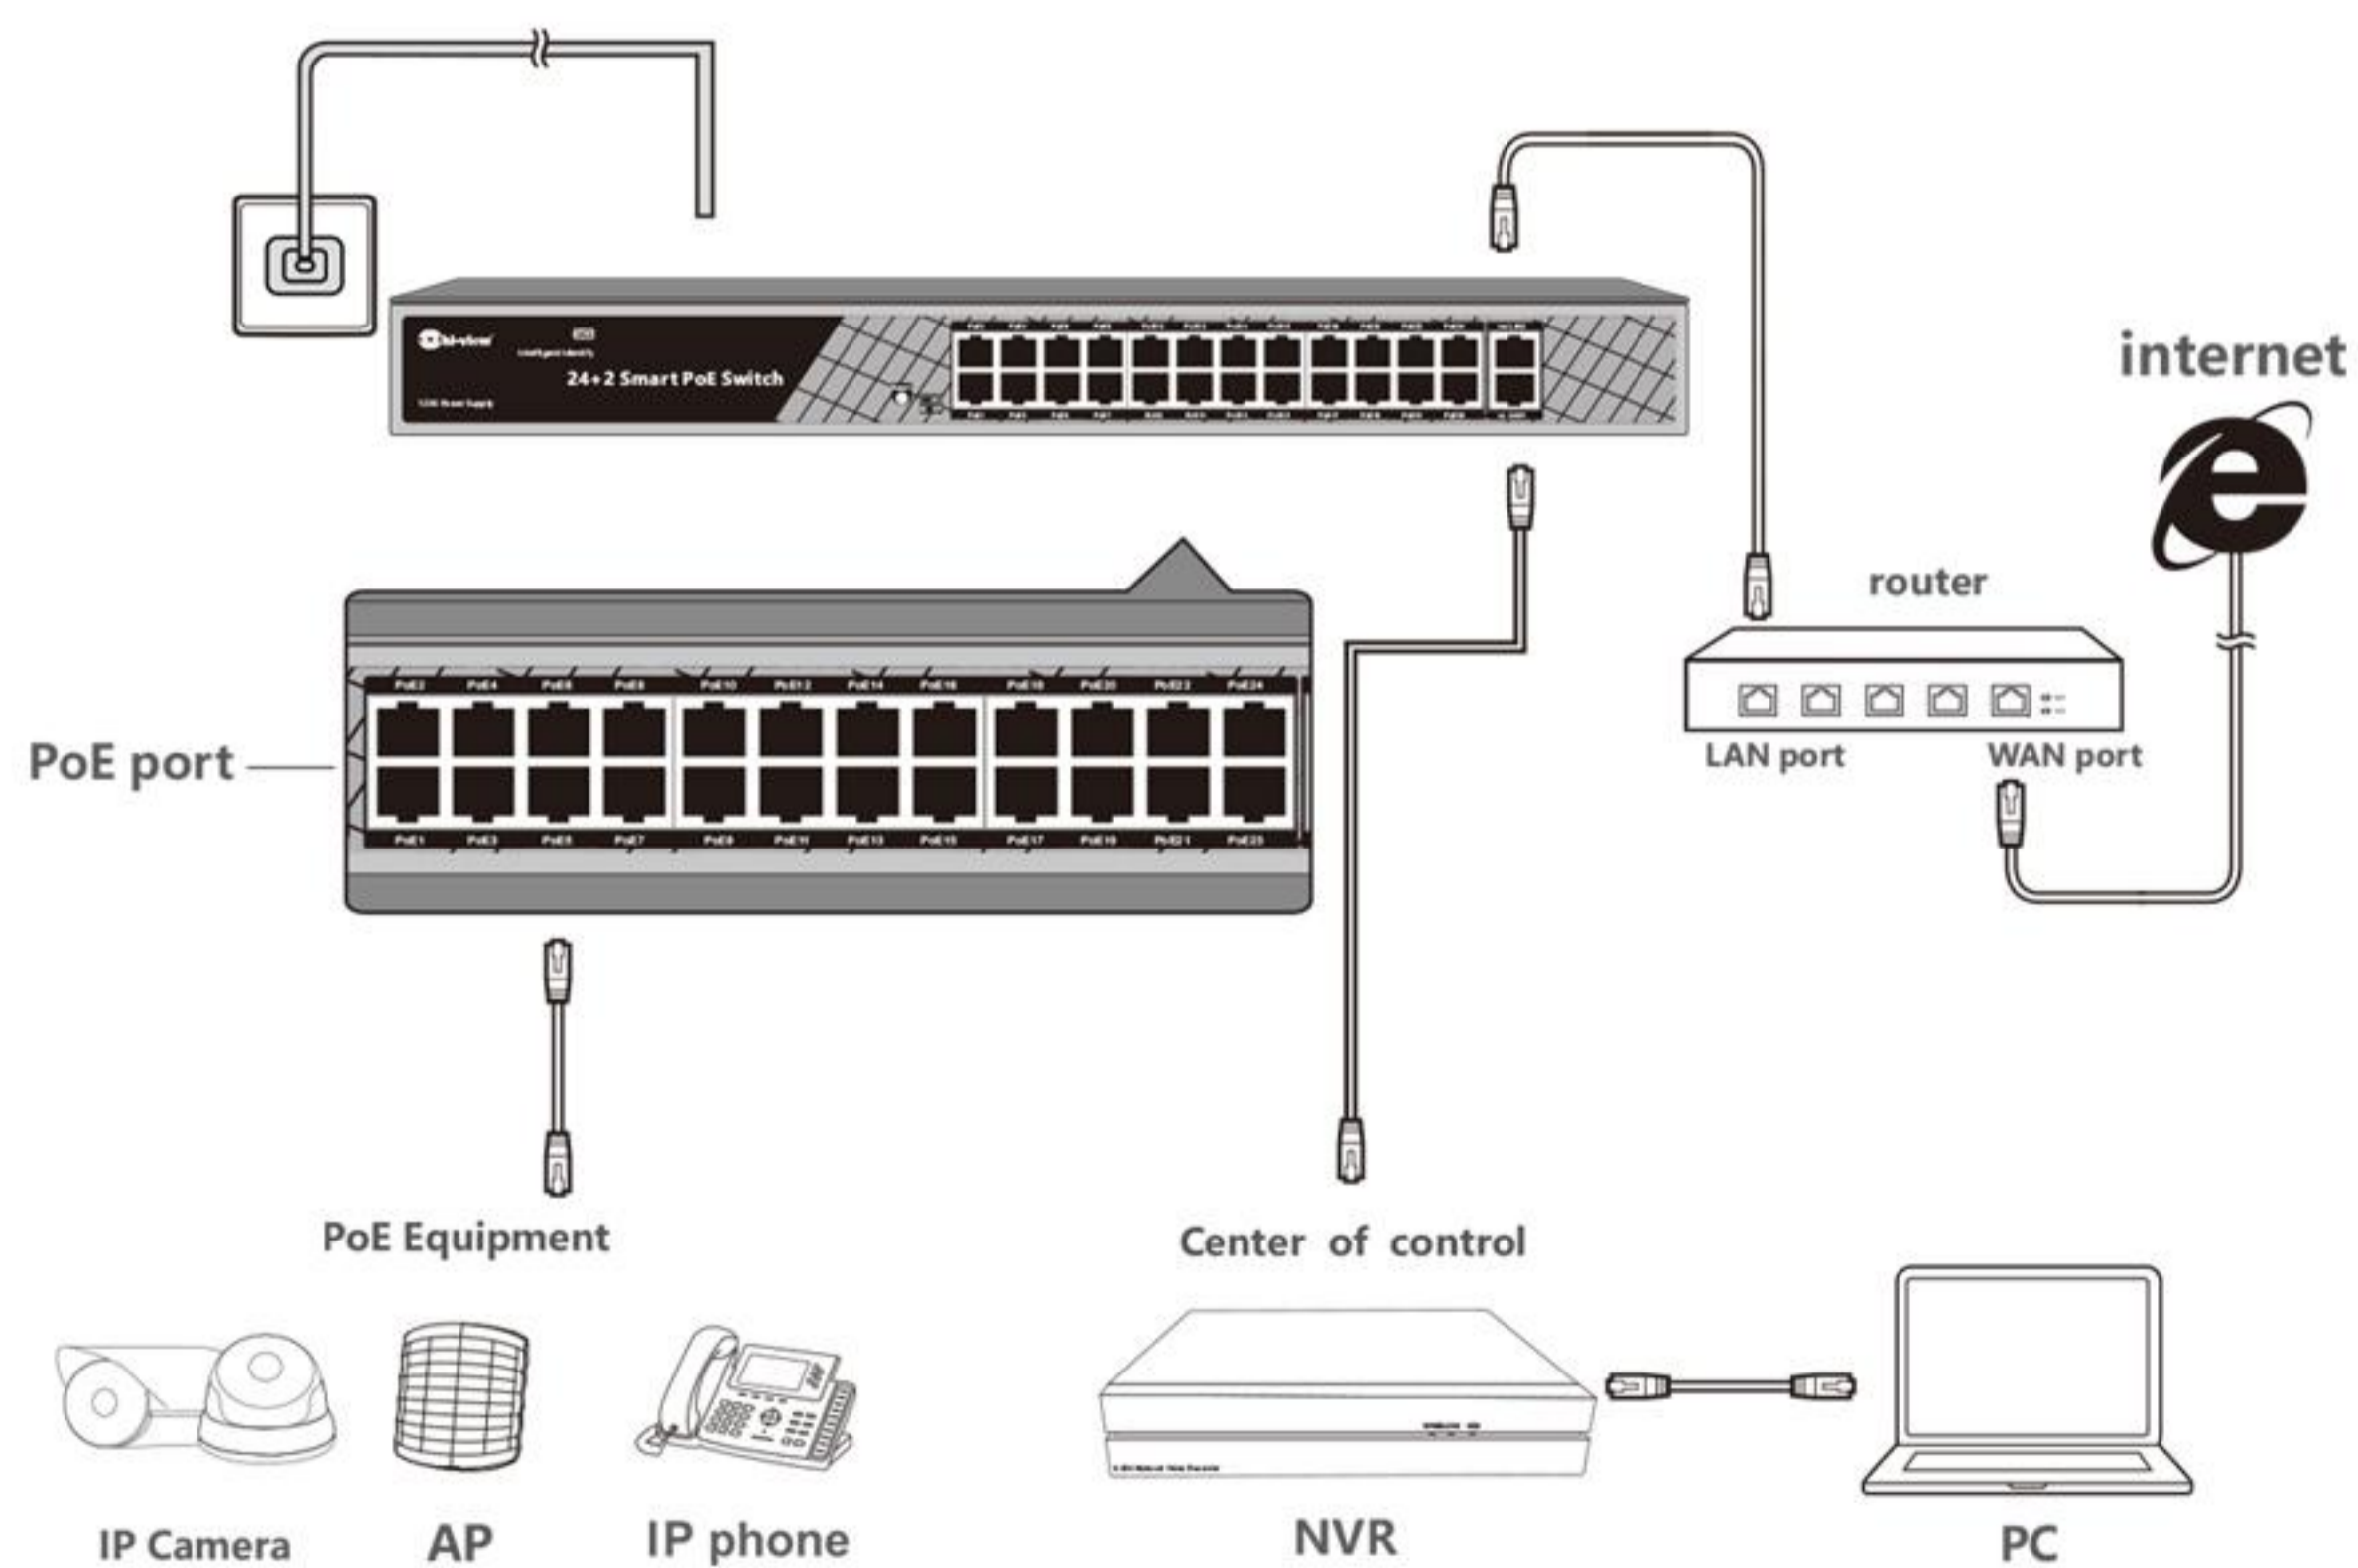

Model	HG-SW26 2P24
Network Interface	PoE (1~24) UP-Link(LAN1~2), Auto MDI / MDIX
SFP Port	-
Network Standard	IEEE802.3af, IEEE802.3at
Long Distance Transmission	Max.200M.
Network performance	Store-and-forward
Transmission Rate	PoE Port :10/100Mbps LAN Port :10/100/1000Mbps 10BASE-T or 100BASE-TX RJ45 port of Ethernet
Performance&Specification	Bandwidth : 2.0 Gbps (no barriers) Network Latency(10 to 100Mbps): $\leq 20\mu s$ (use the 64 byte package size) MAC address table: 4K Isolated port (IPC1-6) public port (7-24,+LAN cascade port)
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.3af/at Power over Ethernet
PoE Core of Power Cable	Default: 1/2(+), 3/6(-); (Can Be Selected 4/5(+), 7/8(-))
LEDs Light	LAN1:Yellow on :1~6Ports transmission 200m(rate:10MB/S) LAN1:Yellow off : 1-24 Ports transmission 100m(rate:100MB/S)
Power Support	Power input : AC110-220V 400W Power output : PoE port 1-24,1/2(+52V),3/6(GND)
Size (LxWxH)	430mmx236mmx44mm
Operating Temperature	-10 °C~+40 °C ( -14 °~104 °F)
Storage Temperature	-40 °C~+70 °C ( -104 °~158 °F)
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing
Electromagnetic Compatibility	CE mark FCC Part 15, Class B VCCI Class B EN 55022 (CISPR 22) C-Tick
Lightning Protection	-
Port no-load Saving Power	Support
Package Content	AC Power Cable, Installation Manual Warranty Card