




Network Speed Dome Camera
Intelligent High Network Speed Dome Camera



HP-39P20

Network Speed Dome Camera

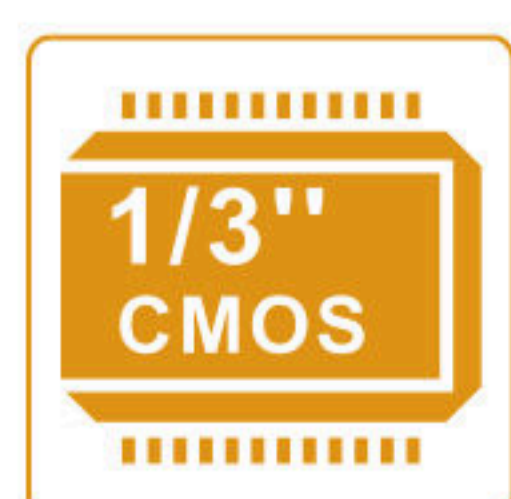

Sensor



Min. Illumination



BLC




WDR



Motion Detection



Day&Night

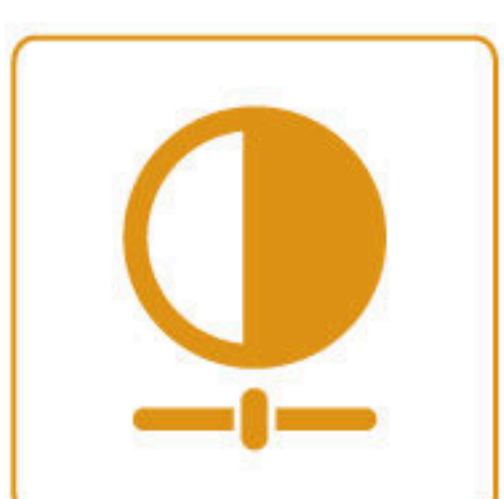

AWB



AGC



PoE



Water-proof

HP-39P20

Feature

- 1/2.8" Progressive Scan CMOS, 20X optical zoom, Digital zoom 240x
- HD Network Video Outout: 1920x1080@25fps(PAL)/30fps(NTSC)
- Support Protocol PELCO-D, PELCO-P
- BLC, HLC, 3D-DNR, AGC, Day&Night, Image Flip, Gamma Control, PAL/NTSC, Privacy Mask
- TCP/IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, WDR
- Network remote storage
- Web GUI menu
- 1CH CVBS Video Output
- IP66 Weather-proof



Specification

Image Sensor	1/2.8" Progressive CMOS	Alarm Linkage	Yes
Effective Pixels	1920(H)x1080(V) 2Mega	Analog Output	1xCVBS output (BNC Male)
Horizontal Resolution	1000TVL	RS-485	1xRS485 (Support Joy stick HV-K01)
Min. Illumination	0.5Lux(Day), 0.1Lux(Night), 0.05Lux(DSS On)	Storage	1xMicro SD Card (Max 32G.)
White Balance	Auto/Manual	Power Supply	AC24V/2000mA.
S/N Ratio	>50dB	Power Consumption	9W (Max 24W, Heater On)
Day/Night	Auto/Manual/Timing	Working Environment	Temperature: -20°C~+60°C
Focus Mode	Auto/Manual	Humidity	Less than 95%
Lens	20X Zoom, f=4.7~94mm, F1.6~F3.5	Protection Level	IP66
Digital Zoom	240X (on/off)	Weight	5KG.
Zoom Speed	1~7 Level	Dimension	219.9 mm. x 310.4 mm.
Pan Range	360° endless rotation		
Pan Speed	Preset Speed: 400°/s; Manual Control Speed: 0.5~80°/s		
Tilt Range	0~90° (auto rotation)		
Tilt Speed	Present Speed: 400°/s; Manual Control Speed: 0.5~80°/s		
PTZ Control	Yes		
OSD Menu	Yes (Support English and Chinese)		
Present	255		
Patrol (Cruise)	8		
Trace	4		
Time Track	8		
Home Position Display	Yes		
Privacy Mask	8		
Auto Flip	Yes		
Compression	H.264		
Frame Rate	1~25fps(PAL) / 1~30fps(NTSC)		
Protocol	TCP/IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PELCO-D, PELCO-P		
Baud Rate	1200, 2400, 4800, 9600		
Smart Alarm	Motion, Sensor		
Resolution	1920x1080, 1280x720, 640x480, 320x240, 160x120		
Multi-stream	Support 4 Multistream (1080P/24fps, 720P/25fps, D1/25fps, CIF/25fps)		
Network Interface	1xRJ45 10Base-T/100Base-TX		
Audio	1xMic input, 1xAudio Output		
Alarm Input	4CH (NO/NC) (Relay 250AC/3A, 30VDC/3A)		
Alarm Output	1CH		

DIMENSION :

